


# TW-200



## Technical data

## 技术参数

Cooling 冷却方式	Gas Cooled 气冷
Duty cycle 60% 暂载率60%	200Amp CO <sub>2</sub> , 150Amp MIX
Wire Size 焊丝直径	Φ 0.6-1.2mm

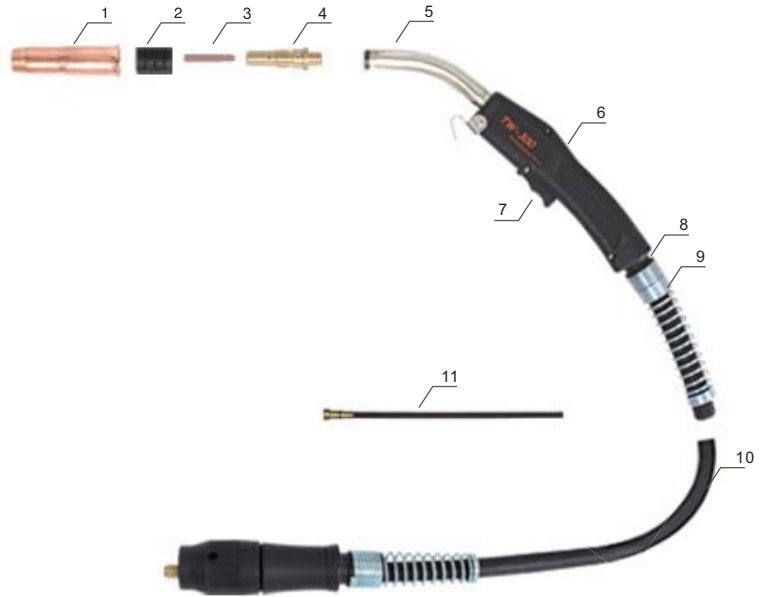

Position	Code	Ref.	Description
1	ICS0789	22-50	Gas nozzle Φ13;喷嘴 Φ 13mm
2	ICK0680	32	Insulator ;绝缘筒
3	ICU0008-09	14-35	Contact tip 0.035";导电嘴 0.035"
4	ICF0077	52	Diffuser ;分流器
5	ICZ0691-02	62J-45	TORCH HEAD 45GR/62J-45/NICKEL-PLATED OUTER TUBE/WITH FITTING 枪颈 45GR/62J-45/镀镍外管/带接头
6	ICV0792	83	MIG handle with screw;MIG手柄带螺丝
7	IHQ0063	81	Trigger switch assembly;开关套件
8	IHJ0787		JOINT FOR TW1-4;手柄用球头/TW1-4
9	IFT0890-01		SPRING FOR CABLE SUPPORT/ZIN/TW;电缆支撑用弹簧/镀白锌/TW
10	ICN0798		Cable assembly;电缆组
11	IIC0067		Steel liner 11' 0.030"-0.035";钢送丝管 11' 0.030"-0.035"
<b>Complete Torch</b>			
	ICT5700		TW2 Torch 3m;TW2枪 3m
	ICT5706		TW2 Torch 4m;TW2枪 4m
	ICT5707		TW2 Torch 4.6m;TW2枪 4.6m
	ICT5715		TW2 Torch 3m euro adaptor;TW2枪 3m/欧式中央插头
	ICT5711		TW2 Torch 4m euro adaptor;TW2枪 4m/欧式中央插头
	ICT5712		TW2 Torch 4.6m euro adaptor;TW2枪 4.6m/欧式中央插头
	ICT5713	M210-3035	TW2 Torch 3m Miller adaptor;TW2枪 3m 米勒后接口
	ICT5714	M212-3035	TW2 Torch 4m Miller adaptor;TW2枪 4m 米勒后接口
	ICT5720	M215-3035	TW2 Torch 4.6m Miller adaptor;TW2枪 4.6m 米勒后接口

Link Welding Technology Co., Limited

Add: Rm. 19C, Lockhart Ctr., 301-307 Lockhart Rd., Wan Chai, Hong Kong.

Tel: +00852-6735 8659 Fax: +00852-3114 9072 Email: info@linkwelding.com