


AUTO MIG 25



Technical data	技术参数
Cooling 冷却方式	Gas Cooled 气冷
Duty cycle 60% 暂载率60%	230Amp CO ₂ , 200Amp MIX
Wire Size 焊丝直径	Φ0.8-1.2mm

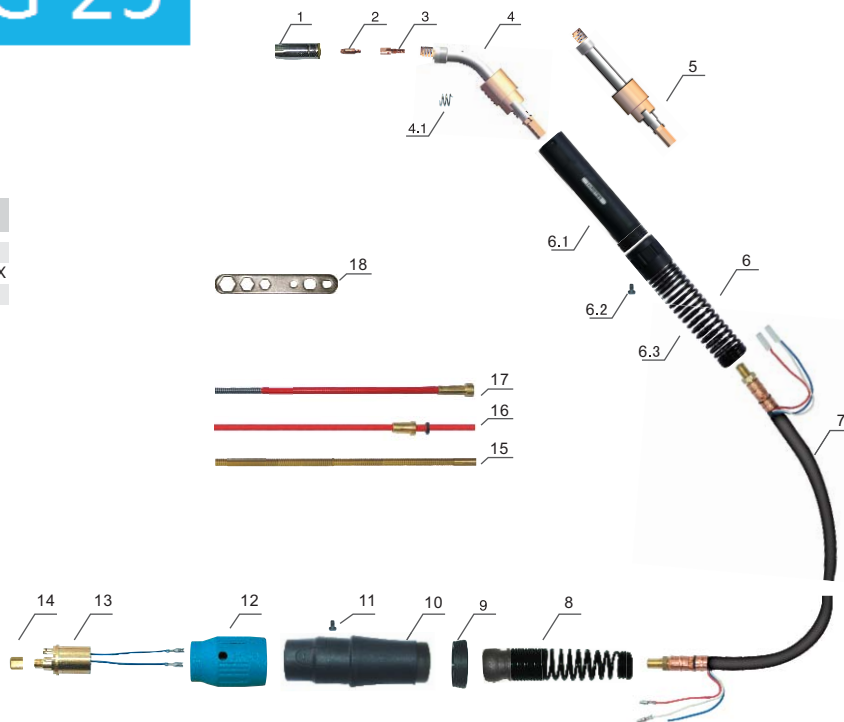

Position	Code	Ref.	Description
1	ICS0078	145.0100	Gas nozzle Φ 15mm; 喷嘴 Φ 15mm
2	ICU0004-10	140.0242	Contact tip Φ 1.0mm E-CU/M6x28; 导电嘴 Φ 1.0mm/M6x28mm
3	ICF0061	142.0001	Gas Diffuser M6x35; 分流器 M6x35 25AK
4	ICZ0780		Torch head auto 25AK 45°; 自动枪头 25AK 45°
4.1	IFT0809	003.0013	spring 25AK; 弹簧 25AK
5	ICZ0786		Torch head auto 25AK 0°; 自动枪头 25AK 0°
6	ICV0671		Handle for auto MIG torch; 手柄套件MIG自动枪颈用
6.1	ICV0675		Handle for auto MIG torch; 手柄MIG自动枪颈用
6.2	IFT0069		Screw M4x8; 螺丝 M4x8
6.3	IFT0898		Spring for cable support; 电缆支撑弹簧
7	ICN0664		Coaxial cable 3m; 同轴电缆组/3m
8	IZH0864		Joint with spring; 带弹簧球节
9	IHJ0715		Handle closing ring; 手柄锁紧环
10	IHJ0703		Back box; 后把套
11	IFT0063		Screw M4x6; 螺丝 M4x6
12	IHJ0070		Adaptor nut/Blue; 焊枪锁紧螺母/蓝色
13	ITB0059	501.2155	Euro central adaptor body/air cooling; 欧式中央接头/空冷
14	IZT0071	501.0082	Liner nut; 送丝管锁紧螺母
15	IIC0220		Brass terminal Φ 2.0x4.0mm 0.35m; 铜送丝管 Φ 2.0x4.0mm/0.35m
16	IIC0160	126.0021	Teflon liner Φ 2.0x4.0mm 3m Red; 特氟龙管 Φ 2.0x4.0mm/3m/红色
17	IIC0560	124.0026	Red liner Φ 1.0-1.2mm 3m; 带绝缘层送丝管 Φ 1.0-1.2mm/3m/红色
18	ICG6000		Spanner for MIG torches; MIG 焊枪扳手
Complete Torch			
	ICT0515		Torch auto MIG25AK 0° 3m euro adaptor/spring pins; 自动焊枪25AK/0°/3m/弹性针
	ICT0517		Torch auto MIG25AK 45° 3m euro adaptor/spring pins; 自动焊枪25AK/45°/3m/弹性针

Link Welding Technology Co., Limited

Add: Rm. 19C, Lockhart Ctr., 301-307 Lockhart Rd., Wan Chai, Hong Kong.

Tel: +00852-6735 8659 Fax: +00852-3114 9072 Email: info@linkwelding.com