


# TORCH 24



## Technical data 技术参数

Cooling 冷却方式	Gas Cooled 气冷
Duty cycle 60% 暂载率60%	250Amp CO <sub>2</sub> , 220Amp MIX
Wire Size 焊丝直径	Φ 0.8-1.2mm

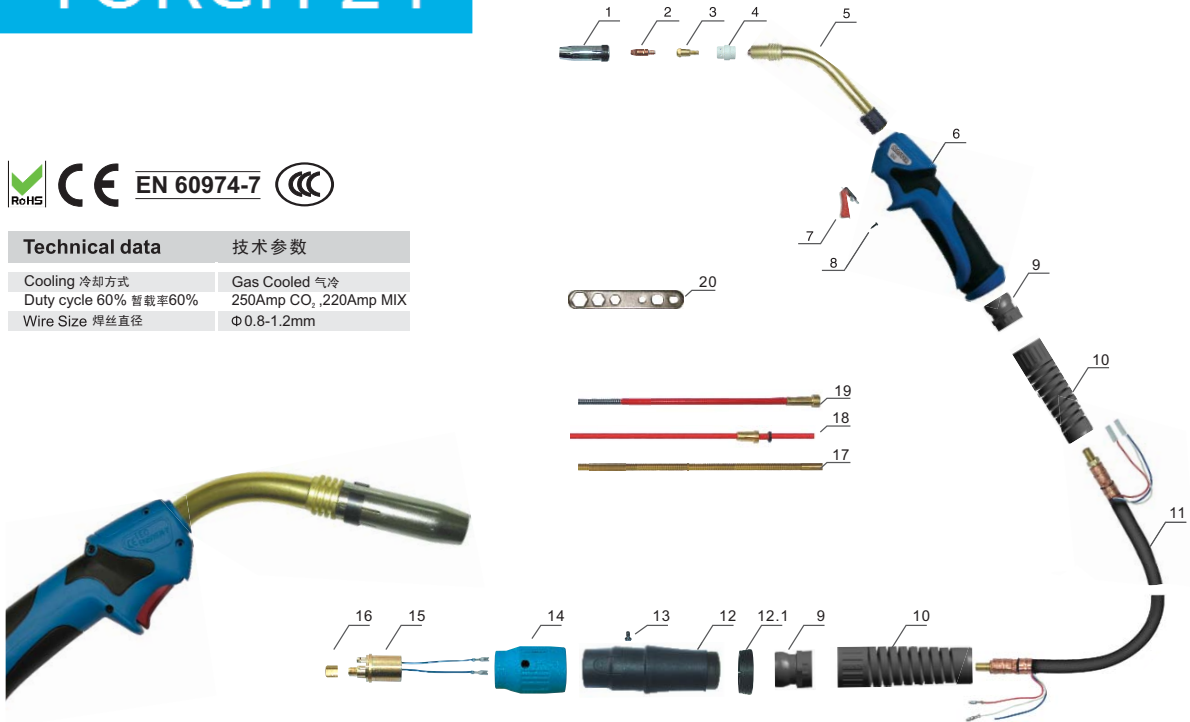

Position	Code	Ref.	Description
1	ICS0806	145.0080	Gas nozzle Φ 12.5mm; 喷嘴 Φ 12.5mm
2	ICU0003-10	140.0253	Contact tip Φ 1.0mm E-CU/M6x25; 导电嘴 Φ 1.0mm/M6x25mm
3	ICU0683	142.0003	Contact tip holder 24KD M6x26mm; 导电嘴座/24KD/M6x26mm
4	ICF0539		White ceramic gas diffuser 24KD; 白色陶瓷分流器 24KD
5	ICZ0630	012.0001	Torch head 24KD; 枪颈 24KD
6	ICV0890		MIG handle Blue/Grip; MIG手柄/蓝色
7	IHQ0070	185.0031	Trigger; 焊枪用开关
8	IFT0874		Screw M3x10; 螺丝 M3x10
9	IHJ0021		Joint for MIG handle; MIG手柄用球头
10	IFT0882		Spring for cable support; 电缆支撑弹簧
11	ICN0664		Coaxial cable 3m; 同轴电缆组 3m
12	IHJ0703		Back box; 后把套
12.1	IHJ0715		Housing for handle; 手柄锁紧环
13	IFT0063		Screw M4x6; 螺丝 M4x6
14	IHJ0072		Adaptor nut; 焊枪锁紧螺母/蓝色
15	ITB0059	501.2155	Euro central adaptor body/air cooling; 欧式中央接头/空冷
16	IZT0071	501.0082	Liner nut; 送丝管锁紧螺母
17	IIC0220		Brass terminal Φ 2.0x4.0mm 0.35m; 铜送丝管 Φ 2.0x4.0mm/0.35m
18	IIC0160	126.0021	Teflon liner Φ 2.0x4.0mm 3m Red; 特氟龙送丝管 Φ 2.0x4.0mm/3m/红色
19	IIC0560	124.0026	Red liner Φ 1.0-1.2mm 3m; 带绝缘层送丝管 Φ 1.0-1.2mm/3m/红色
20	ICG6000		Spanner for MIG torches; MIG焊枪扳手
<b>Complete Torch</b>			
	ICT2698-36		MIG 24KD torch 3m euro adaptor /spring pins; 焊枪24KD/3m/弹性针
	ICT2699-36		MIG 24KD torch 4m euro adaptor /spring pins; 焊枪24KD/4m/弹性针
	ICT2695-36		MIG 24KD torch 5m euro adaptor /spring pins; 焊枪24KD/5m/弹性针

Link Welding Technology Co., Limited

Add: Rm. 19C, Lockhart Ctr., 301-307 Lockhart Rd., Wan Chai, Hong Kong.

Tel: +00852-6735 8659 Fax: +00852-3114 9072 Email: info@linkwelding.com