


TW-300



Technical data

技术参数

Cooling 冷却方式	Gas Cooled 气冷
Duty cycle 60% 暂载率60%	300Amp CO ₂ , 250Amp MIX
Wire Size 焊丝直径	Φ 0.8-1.6mm

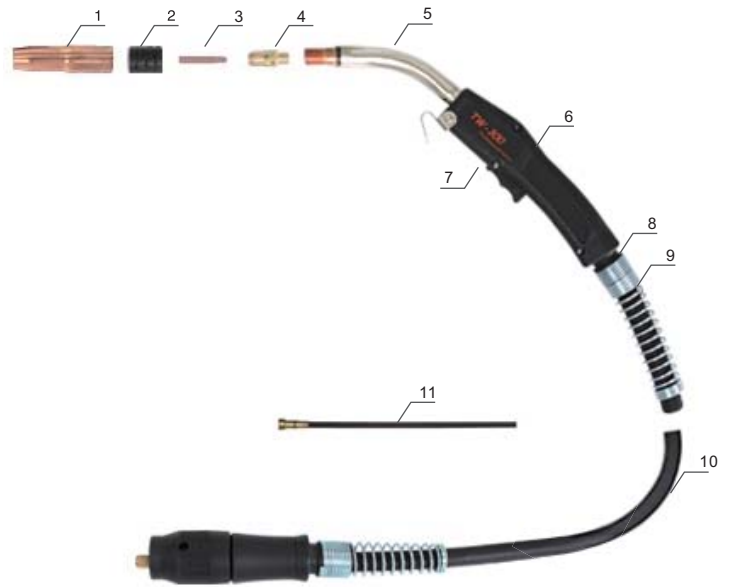

Position	Code	Ref.	Description
1	ICS0691	24A-62	Gas nozzle Φ16;喷嘴 Φ 16mm
2	ICK0686	34A	Insulator;绝缘筒
3	ICU0008-12	14-45	Contact tip 0.045";导电嘴 0.045"
4	ICF0070	54A	Diffuser ;分流器
5	ICZ0694-01	63J-45	Conductor tube 45°;枪颈 45°
6	ICV0792	83	MIG handle with screw;MIG手柄带螺丝
7	IHQ0063	92	Trigger Kit;开关套件
8	IHJ0787		JOINT FOR TW1-4;手柄用球头/TW1-4
9	IFT0890-01		SPRING FOR CABLE SUPPORT/ZIN/TW;电缆支撑用弹簧/镀白锌/TW
10	ICN0900		Cable assembly;电缆组
11	IIC0067		Steel liner 11' 0.030"-0.035";钢送丝管 11' 0.030"-0.035"
Complete Torch			
	ICT5800	310-3545	TW3 Torch 3m;TW3枪 3m
	ICT5806	312-3545	TW3 Torch 4m;TW3枪 4m
	ICT5807	315-3545	TW3 Torch 4.6m;TW3枪 4.6m
	ICT5815	X310-3545	TW3 Torch 3m euro adaptor;TW3枪 3m 欧式中央插头
	ICT5811	X312-3545	TW3 Torch 4m euro adaptor;TW3枪 4m 欧式中央插头
	ICT5812		TW3 Torch 4.6m euro adaptor;TW3枪 4.6m 欧式中央插头
	ICT5813	M310-3545	TW3 Torch 3m Miller adaptor;TW3枪 3m 米勒后接口
	ICT5814	M312-3545	TW3 Torch 4m Miller adaptor;TW3枪 4m 米勒后接口
	ICT5820	M315-3545	TW3 Torch 4.6m Miller adaptor;TW3枪 4.6m 米勒后接口

Link Welding Technology Co., Limited

Add: Rm. 19C, Lockhart Ctr., 301-307 Lockhart Rd., Wan Chai, Hong Kong.

Tel: +00852-6735 8659 Fax: +00852-3114 9072 Email: info@linkwelding.com