

TORCH 26





Technical data

技术参数

Cooling 冷却方式	Water cooled 水冷
Duty cycle 60% 暂载率60%	290Amp CO ₂ , 260Amp MIX
Wire Size	Φ0.8-1.2mm

焊丝直径

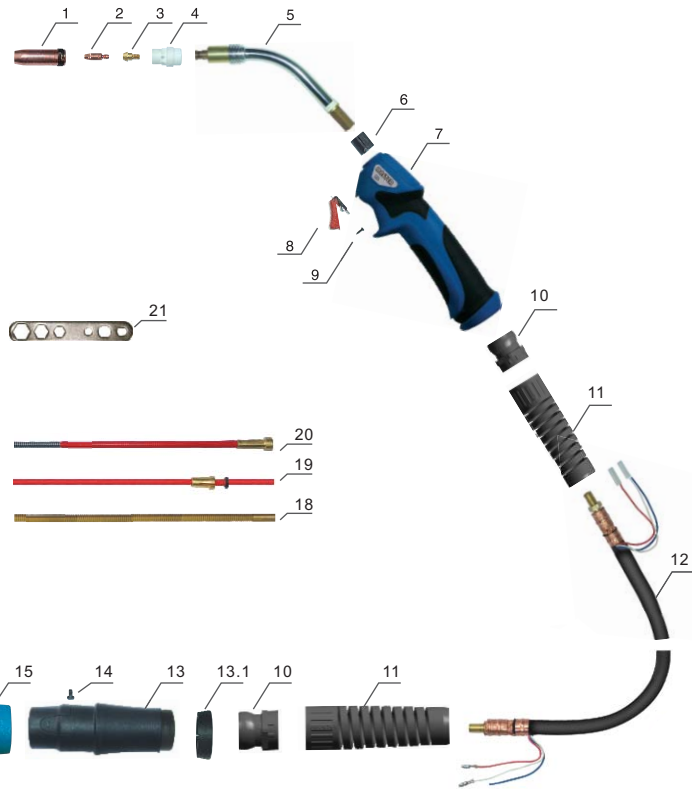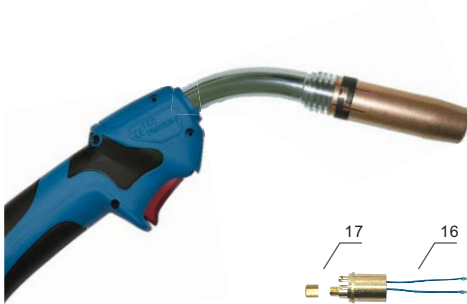

Position	Code	Ref.	Description
1	ICS0713	145.0085	Gas nozzle Φ16mm; 喷嘴 Φ16mm
2	ICU0004-10	140.0242	Contact tip Φ1.0mm E-CU/M6x28mm; 导电嘴 1.0mm/M6x28mm
3	ICU0016	142.0007	Contact tip holder M6x22mm; 导电嘴座/M6x22mm
4	ICF0535	018.0141	White ceramic gas diffuser 26KD; 白色陶瓷分流器 26KD
5	ICZ0636	018.0001	Torch head 26KD; 枪颈 26KD
6	IHJ0030-01	400.0044	Plastic Body; 塑料适配器
7	ICV0890		MIG handle Blue/Grip; MIG手柄/蓝色
8	IHQ0070	185.0031	Trigger; 焊枪用开关
9	IFT0874		Screw M3x10; 螺丝 M3x10
10	IHJ0021		Joint for MIG handle; MIG手柄用球头
11	IFT0882		Spring for cable support; 电缆支撑弹簧
12	ICN0696	160.0239	Coaxial cable 3m; 同轴电缆组3m
13	IHJ0703		Back box; 后把套
13.1	IHJ0715		Housing for handle; 手柄锁紧环
14	IFT0063		Screw M4x6; 螺丝 M4x6
15	IHJ0072		Adaptor nut; 焊枪锁紧螺母
16	ITB0059	501.2155	Euro central adaptor body/air cooling; 欧式中央接头/空冷
17	IZT0071	501.0082	Liner nut; 送丝管锁紧螺母
18	IIC0220		Brass terminal Φ2.0x4.0mm 0.35m; 铜送丝管 Φ2.0x4.0mm/0.35m
19	IIC0160	126.0021	Teflon liner Φ2.0x4.0mm 3m Red; 特氟龙送丝管 Φ2.0x4.0mm/3m/红色
20	IIC0560	124.0026	Red liner Φ1.0-1.2mm 3m; 带绝缘层送丝管 Φ1.0-1.2mm/3m/红色
21	ICG6000		Spanner for MIG torches; MIG焊枪扳手
Complete Torch			
	ICT2898-36		MIG 26KD torch 3m euro adaptor /spring pins; 焊枪26KD/3m/弹性针
	ICT2899-36		MIG 26KD torch 4m euro adaptor /spring pins; 焊枪26KD/4m/弹性针
	ICT2895-36		MIG 26KD torch 5m euro adaptor /spring pins; 焊枪26KD/5m/弹性针

Link Welding Technology Co., Limited

Add: Rm. 19C, Lockhart Ctr., 301-307 Lockhart Rd., Wan Chai, Hong Kong.

Tel: +00852-6735 8659 Fax: +00852-3114 9072 Email: info@linkwelding.com