


# TORCH 36



## Technical data

## 技术参数

Cooling 冷却方式	Gas Cooled 气冷
Duty cycle 60% 暂载率60%	340Amp CO <sub>2</sub> , 300Amp MIX
Wire Size 焊丝直径	Φ 0.8-1.6mm

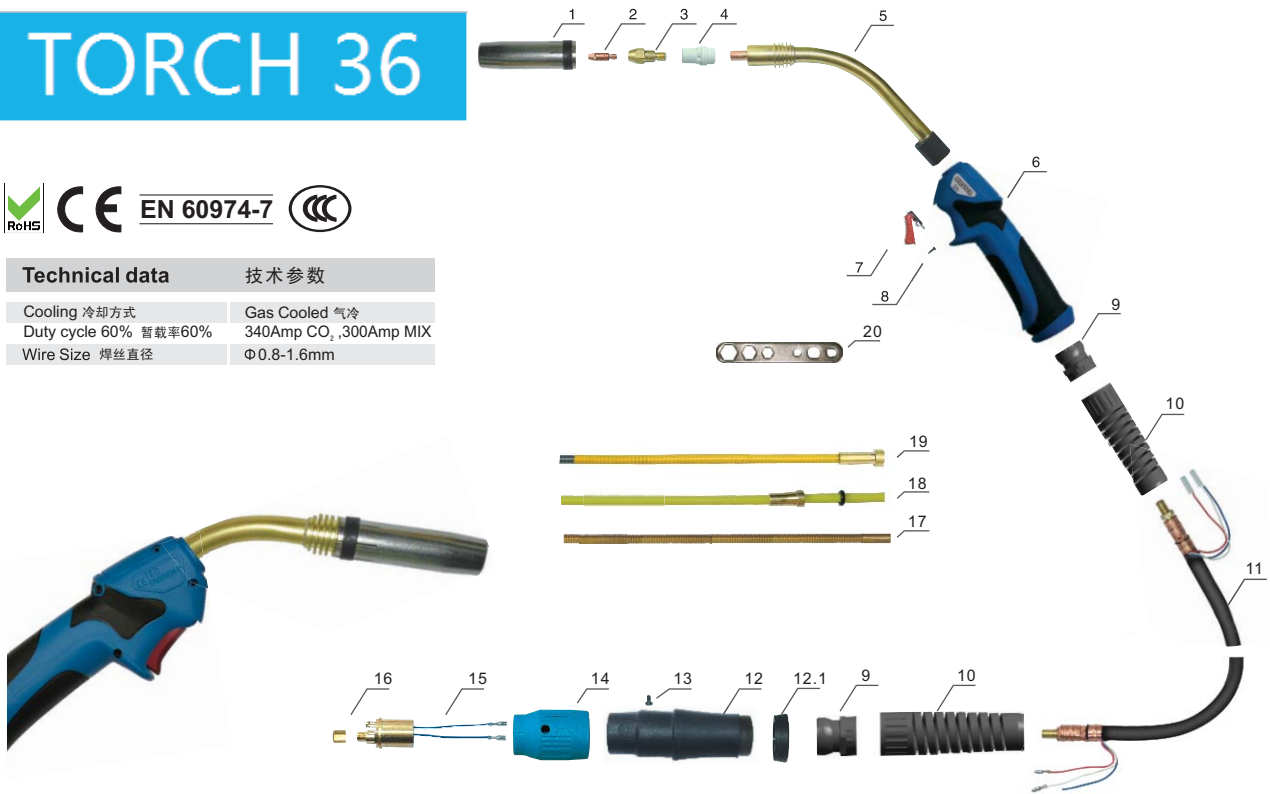

Position	Code	Ref.	Description
1	ICS0072	145.0078	Gas nozzle Φ 16mm; 喷嘴 Φ 16mm
2	ICU0004-12	140.0379	Contact tip Φ 1.2mm E-CU/M6x28; 导电嘴 Φ 1.2mm/M6x28mm
3	ICU0686	142.0011	Contact tip holder M6x32mm; 导电嘴座/M6x32mm
4	ICF0562	014.0023	White ceramic gas diffuser; 白色陶瓷分流器 36KD
5	ICZ0089	014.0006	Torch head 36KD; 枪颈 36KD
6	ICV0890		MIG handle Blue/Grip; MIG手柄/蓝色
7	IHQ0070	185.0031	Trigger; 焊枪用开关
8	IFT0874		Screw M3x10; 螺丝 M3x10
9	IHJ0021		Joint for MIG handle; MIG手柄用球头
10	IFT0882		Spring for cable support; 电缆支撑弹簧
11	ICN0670	160.0364	Coaxial cable 3m; 同轴电缆组3m
12	IHJ0703		Back box; 后把套
12.1	IHJ0715		Housing for handle; 手柄锁紧环
13	IFT0063		Screw M4x6; 螺丝 M4x6
14	IHJ0072		Adaptor nut; 焊枪锁紧螺母/蓝色
15	ITB0059		Euro central adaptor body/air cooling; 欧式中央接头/空冷
16	IZT0071		Liner nut; 送丝管锁紧螺母
17	IIC0226		Brass terminal Φ 3.0x4.5mm 0.35m; 铜送丝管 Φ 3.0x4.5mm/0.35m
18	IIC0210	126.0039	Teflon liner Φ 3.0x4.5mm 3m Yellow; 特氟龙管 Φ 3.0x4.5mm/3m/黄色
19	IIC0590	124.0041	Yellow liner Φ 1.2-1.6mm 3m; 带绝缘层送丝管 Φ 1.2-1.6mm/3m/黄色
20	ICG6000		Spanner for MIG torches; MIG焊枪扳手

## Complete Torch

	ICT2998-36		MIG 36KD torch 3m euro adaptor/spring pins; 焊枪36KD/3m/弹性针
	ICT2999-36		MIG 36KD torch 4m euro adaptor/spring pins; 焊枪36KD/4m/弹性针
	ICT2995-36		MIG 36KD torch 5m euro adaptor/spring pins; 焊枪36KD/5m/弹性针

Link Welding Technology Co., Limited

Add: Rm. 19C, Lockhart Ctr., 301-307 Lockhart Rd., Wan Chai, Hong Kong.

Tel: +00852-6735 8659 Fax: +00852-3114 9072 Email: info@linkwelding.com